

Single Compression Gland for Armoured and Unarmoured Flat Cable and featuring a Female Conduit Connection

Ex db : Ex eb : Ex nR : Ex ta : IP66 : IP68 : Class I Zone 1 : AEx eb : AEx ta



PRODUCT DESCRIPTION

"A8CF" type glands are certified Flameproof Ex db, Increased Safety Ex eb, Restricted Breathing Ex nR and Dust Protected Ex ta. They are suitable for use in Zone 1 and 2 for Gas Groups IIA, IIB and IIC and additionally for use in Zones 20, 21 and 22 for Dust Groups IIA, IIB and IIC. Also certified for Zone and Division installations for use with Marine Shipboard and Tray Cables under the NEC and CEC. Developed for flat cables, they provide controlled Ex db, IP sealing and have been tested to IP66 and IP68 to 50 metres. The "A8CF" version is designed to accommodate unarmoured and armoured cables where sealing and retention is required only on the outer sheath and additionally provides a female thread for the connection of conduit.

COMPLIANCE STANDARDS:

EN 60079-0, EN 60079-1, EN 60079-7, EN 60079-15, EN 60079-31
IEC 60079-0, IEC 60079-1, IEC 60079-7, IEC 60079-31 & IEC 60529
C22.2 (see certificate), CAN/CSA 60079-0/1/7/31
UL514B, UL1203, UL2225, UL50E, ANSI/UL 60079-0/7, ISA 60079-31

CERTIFICATION:	UKEX	II 1D 2G Ex db IIC Gb / Ex eb IIC Gb / Ex ta IIIC Da II 3G Ex nR IIC Gc
	ATEX	II 1D 2G Ex db IIC Gb / Ex eb IIC Gb / Ex ta IIIC Da II 3G Ex nR IIC Gc
	IECEX	Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
	CEC - Canada	Ex db IIC Gb / Ex eb IIC Gb / Ex ta IIIC Da Class II Group E, F & G Class III Type 4X
	NEC - USA	Class I Zone 1 AEx eb IIC Gb / Zone 20 AEx ta IIIC Da Class II Group E, F & G Class III Type 4X
	EAC	1Ex db IIC Gb X / 1Ex eb IIC Gb X / 2Ex nR IIC Gc X / Ex ta IIIC Da X
	INMETRO - Brazil	Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
	CCC - China	Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
	UKRAINE	II 2G Ex db IIC Gb / II 2G Ex eb IIC Gb / II 3G Ex nR IIC Gc / II 1D Ex ta IIIC Da
	CcCoE - India	Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
CERTIFICATION No:	ECAS-Ex - U.A.E	Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
	ABS	Specified ABS Rules
	LLOYD'S	Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
	DNV	Ex db IIC Gb / Ex eb IIC Gb / Ex nR IIC Gc / Ex ta IIIC Da
	UKEX	CML 21UKEX1033X & CML 21UKEX4043X
	ATEX	CML 19ATEX1346X & CML 19ATEX4109X
	IECEX	IECEX CML 19.0104X
	CEC - Canada	CSA 1356011
	NEC - USA	CSA 1356011
	EAC	RU C-GB.AX58.B.05106/24


UKEX	CML 21UKEX1033X & CML 21UKEX4043X
ATEX	CML 19ATEX1346X & CML 19ATEX4109X
IECEX	IECEX CML 19.0104X
CEC - Canada	CSA 1356011
NEC - USA	CSA 1356011
EAC	RU C-GB.AX58.B.05106/24
INMETRO - Brazil	NCC 13.2187 X
CCC - China	2021312313000447
UKRAINE	CL 18.0321 X
CcCoE - India	PESO P494321/7 & P494321/13
ECAS-Ex - U.A.E	25-06-153223/E25-06-159811/NB0007
ABS	25-0158110-PDA
LLOYD'S	LR25189453TA
DNV	TAE00004XK

CABLE GLAND SELECTION TABLE
(ALL DIMENSIONS IN mm)

Gland Size	Entry Thread Size		Metric Thread Length [B]	Connection Thread Options		Cable Outer Sheath [D]				Nominal Protusion Length [L] (Metric)	Dimensions/Weight (Metric Versions)		
	Metric	NPT		Metric	NPT	Min	Max	Min	Max		Across Flats [A]	Across Corners	Weight (Kgs)
20S	M20 x 1.5	1/2" or 3/4"	16	M20 x 1.5	1/2" or 3/4"	6.3	11.7	4.0	7.0	45	30.0	33.0	0.174
20R	M20 x 1.5	1/2" or 3/4"	16	M20 x 1.5	1/2" or 3/4"	8.1	13.5	5.8	6.2	46	30.0	33.0	0.175
20	M20 x 1.5	1/2" or 3/4"	16	M20 x 1.5	1/2" or 3/4"	10.3	13.5	5.6	9.0	45	30.0	33.0	0.174
25*	M25 x 1.5	3/4" or 1"	16	M25 x 1.5	3/4" or 1"	10.6	16.2	4.0	7.0	48	37.6	41.4	0.194

- NOTES
- Gland size does not necessarily equate to the entry thread size.
 - Dimensions (A) & (B) may differ for glands with non metric entry threads. Please refer to our "Thread Reference Tables" for specific dimensions.
 - Assembly instructions must be read prior to installation and adhered to in full.
 - Peppers supply products with parallel entry threads that conform to the flameproof threaded joint requirements of IEC/EN 60079-1 and other equivalent standards. We usually incorporate a thread run out according to general machining techniques and parts will not have a full form thread for the entire length. Peppers Cable Glands Limited will not be held responsible for clients' installations where this has not been taken into account.

PRODUCT TYPE A8CF

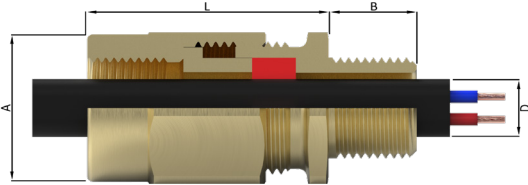

EXAMPLE PART NUMBERING:
A8CFBFM20/NP/20/M20

A	Gland designed for use with Unarmoured Cables	
B	Silicone Seal for Flat Cables	
CF	Female Conduit Connection Thread	
B	Brass (B) / Stainless Steel (S)	
F	Multiple Certification	
OPTIONS	K-V-H	Locknut & Nylon (K), Fibre (V) or PTFE (H) IP Washer
	T	Including Earth Tag
	S	Including Serrated Washer
	1	Quantity per kit
M20	M20 x 1.5 Female Conduit Connection Thread	
NP	Nickel Plated	
20	Gland shell size	
M20	M20 x 1.5 Male Entry Thread	

OPTIONAL ACCESSORIES:

LOCKNUT (L)	Brass (ACBLN) / Stainless Steel (ACSLN)
EARTH TAG (T)	Brass (ACBET) / Stainless Steel (ACSET)
IP WASHERS	Nylon (N) / Fibre (J) / PTFE (Z)
SERRATED WASHERS	Stainless Steel (S)
IP RATING:	IP66 & IP68 (50 metres - 7 Days), Type 4X
OPERATING TEMP:	Silicone Seals -60°C to +180°C
MATERIALS:	Brass or Stainless Steel
PLATING:	Electroless Nickel

- When selecting IP Washer material for use with glands, please be aware of the accessories temperature range to ensure they are suitable for the intended installation.
- Where approval in addition to UKEX, ATEX, IECEx and CSA is required, this must be clearly requested at time of enquiry / order.
- Size 25 is not covered for RS applications.